


SORA silico EPC

SORA silico EPC je enostransko premazan papir za premazovanje s silikonom.

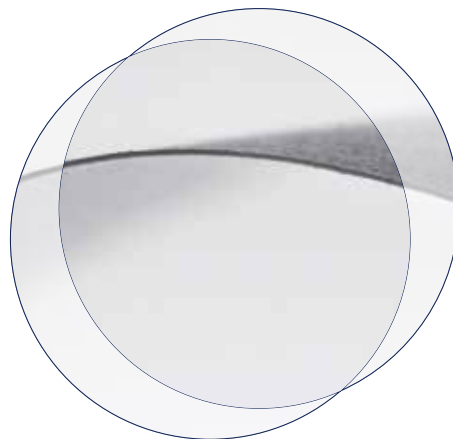

silico EPC

TS – 16. 07. 2019

| | STANDARD | 36 | 40 | 43 | 45 | 47 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 90 | 105 | 125 | Toleranca |
|--|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
| GRAMATURA [g/m ²] | ISO 536 | 36 | 40 | 43 | 45 | 47 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 90 | 105 | 125 | ± 2 |
| DEBELINA [μm] | ISO 534 | 42 | 46 | 48 | 50 | 53 | 56 | 62 | 67 | 70 | 78 | 83 | 90 | 101 | 108 | 129 | ± 4 |
| GLADKOST BENDTSEN premazana stran [ml/min] | ISO 8791-2 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | ± 35 |
| D65 BELINA [%] | DIN EN 20287 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | ± 2 |
| CIEBELINA [%] | ISO 2470 (D65/10°) | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | |
| COBB 120 (ricinusovo olje) [g/m ² /120 s] | DIN EN 20535 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | ± 2 |

Navedeni parametri so okvirni in se lahko spremenijo. Veljavna je zadnja objavljena specifikacija na spletni strani www.goricane.si. Informacije o možnosti dobave FSC® in PEFC certificiranih proizvodov so na voljo v prodajnem oddelku.



ISEGA

GORIČANE