


SORA silico PVA

SORA silico PVA is clay coated craft—2 sides.

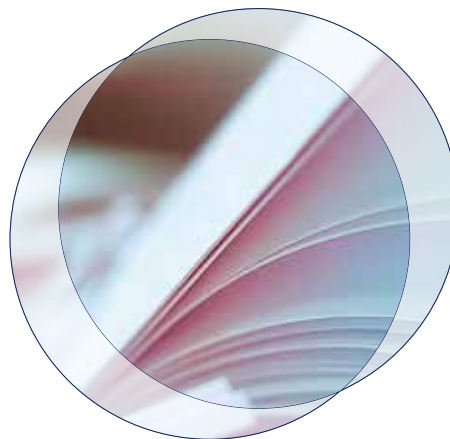

silico PVA

TS — 16. 07. 2019

	STANDARD	90	Tolerance
GRAMMAGE [g/m ²]	ISO 536	90	± 2
THICKNESS [μm]	ISO 534	90	± 4
SMOOT. BENDTSEN coated side [ml/min]	ISO 8791-2	50	± 20
ABS. HUMIDITY [%]	DIN EN 20287	3.8	± 0.5
D65 BRIGHTNESS [%]	ISO 2470-2 (D65/10°)	80	min
COBB 120 (castor oil) [g/m ² /120 s]	DIN EN 20535	3.5	max

Given values can be used as guide values only and can be changed without prior notice.
For a valid specification, please refer to the one most recently published on the website www.goricane.si.
Information on the supplies of FSC® and PEFC certified products are available in the Sales department.



ISEGA

GORIČANE