


SORA silico EPC

SORA silico EPC je brezlesni enostransko premazan papir za premazovanje s silikonom.

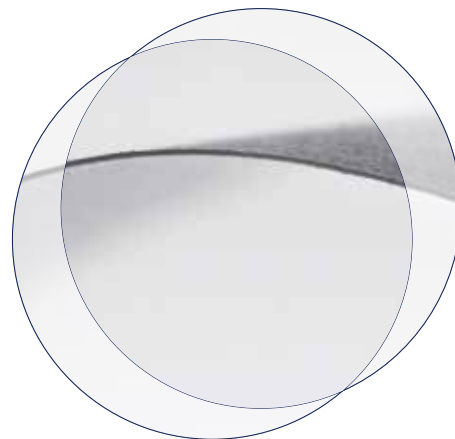

silico EPC

TS — 25. 5. 2021

	STANDARD	36	40	45	47	50	55	60	70	75	80	90	105	120	Toleranca
GRAMATURA [g/m ²]	ISO 536	36	40	45	47	50	55	60	70	75	80	90	105	120	± 2
DEBELINA [μm]	ISO 534	42	45	50	53	56	62	67	78	83	90	101	108	124	± 4
GLADKOST BENDTSEN premazana stran [ml/min]	ISO 8791-2	50	50	50	50	50	50	50	50	50	50	50	50	50	± 20
ABSOLUTNA VLAGA [%]	DIN EN 20287	4,0	4,0	4,0	4,0	4,0	4,0	4,0	4,0	4,0	4,0	4,0	4,0	4,0	± 0,5
D65 BELINA [%]	ISO 2470 (D65/10°)	80	80	80	80	80	80	80	80	80	80	80	80	80	
COBB 120 (fricinusovo olje) [g/m ² /120 s]	DIN EN 20535	2,5	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	max

Navedeni parametri so okvirni in se lahko spremenijo. Veljavna je zadnja objavljena specifikacija na spletni strani www.goricane.si. Informacije o možnosti dobave FSC® in PEFC™ certificiranih proizvodov so na voljo v prodajnem oddelku.



ISEGA

GORIČANE