


SORA silico EPC

SORA silico EPC is a woodfree clay coated craft—1 side.

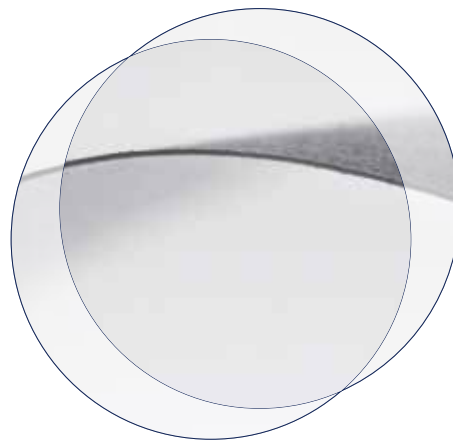

silico EPC

TS — 25. 5. 2021

	STANDARD	36	40	45	47	50	55	60	70	75	80	90	105	120	Tolerance
GRAMMAGE [g/m ²]	ISO 536	36	40	45	47	50	55	60	70	75	80	90	105	120	± 2
THICKNESS [cm ³ /g]	ISO 534	42	45	50	53	56	62	67	78	83	90	101	108	124	± 4
SMOOT. BENDTSEN [ml/min]	ISO 8791-2	50	50	50	50	50	50	50	50	50	50	50	50	50	± 20
ABS. HUMIDITY [%]	DIN EN 20287	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	± 0.5
D65 BRIGHTNESS [%]	ISO 2470 (D65/10°)	80	80	80	80	80	80	80	80	80	80	80	80	80	
COBB 120 (castor oil) [g/m ² /120 s]	DIN EN 20535	2.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	max

Given values can be used as guide values only and can be changed without prior notice.
For a valid specification, please refer to the one most recently published on the website www.goricane.si.
Information on the supplies of FSC® and PEFC™ certified products are available in the Sales department.



ISEGA

GORIČANE