


SORA silico EPC

SORA silico EPC is one side clay coated craft paper.

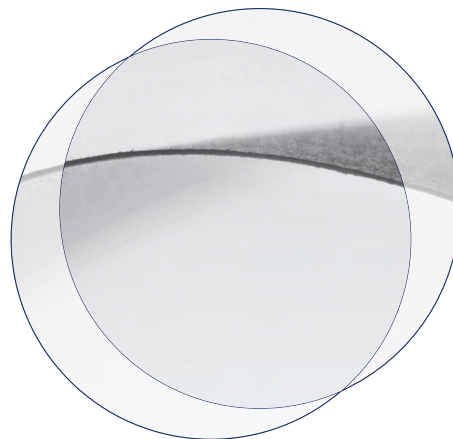

silico EPC

TS – 2.3.2022

	STANDARD	36	40	45	47	50	55	60	70	75	80	90	105	Tolerance
GRAMMAGE [g/m ²]	ISO 536	36	40	45	47	50	55	60	70	75	80	90	105	± 2
THICKNESS [cm ³ /g]	ISO 534	40	44	49	51	54	59	64	75	81.5	87	97	105	± 4
SMOOT. BENDTSEN coated side [ml/min]	ISO 8791-2	50	50	50	50	50	50	50	50	50	50	50	50	± 20
ABSOLUTE HUMIDITY [%]	DIN EN 20287	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	± 0.5
D65 BRIGHTNESS [%]	ISO 2470 (D65/10°)	80	80	80	80	80	80	80	80	80	80	80	80	
COBB 120 (castor oil) [g/m ² /120 s]	DIN EN 20535	2.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	± 2

Given values can be used as guide values only and can be changed without prior notice.
For a valid specification, please refer to the one most recently published on the website www.goricane.si.
Information on the supplies of FSC® and PEFC certified products are available in the Sales department.



ISEGA

GORIČANE