


SORA light UVF

SORA light UVF is a lightweight pigmented woodfree graphic paper with UV visible security.

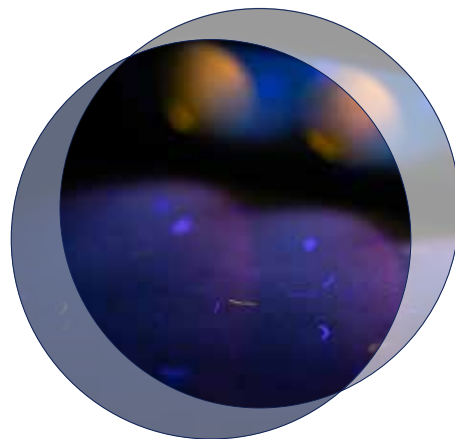

light UVF

TS — 4. 3. 2024

	STANDARD	37	40	45	50	60	Tolerance
GRAMMAGE [g/m ²]	ISO 536	37	40	45	50	60	± 2
THICKNESS [μm]	ISO 534	42,5	46	52	57,5	69	± 4
SMOOTHNESS BENDTSEN [ml/min]	ISO 8791-2	100	100	100	100	100	± 40
RELATIVE HUMIDITY [%]	DIN 53118	47.5	47.5	47.5	47.5	47.5	± 7.5
D65 BRIGHTNESS [%]	ISO 2470-2 (D65/10°)	84	84	84	84	84	
OPACITY [%]	ISO 2471	77	81	85	88	92	± 2

Given values can be used as guide values only and can be changed without prior notice.
For a valid specification, please refer to the one most recently published on the website www.goricane.si.
Information on the supplies of FSC® and PEFC certified products are available in the Sales department.

