


Climatic conditions of paper use in reels and palettes

Our products are packed in a way which guarantees the preservation of paper humidity under various conditions of storage and transportation.

It is important that the paper user ensures the correct conditioning of paper depending on the environment temperature before the packaging is removed. This causes the humidity to remain unchanged during either heating or cooling of paper. **WARNING!** Remove the packaging from the reel or palette only when the paper is entirely conditioned on the environment temperature. It is important to stress that the conditioning time of the unit (either reel or palette) depends on the difference in temperature and unit size. For a temperature difference of 10°C, a unit (reel or palette) requires up to 1 day of conditioning and for a difference of 20°C, it needs up to 2 days of conditioning.

Every production unit (reel or palette) has a label, where icons are used to describe conditions of storage and paper usage (in the left side of the label).

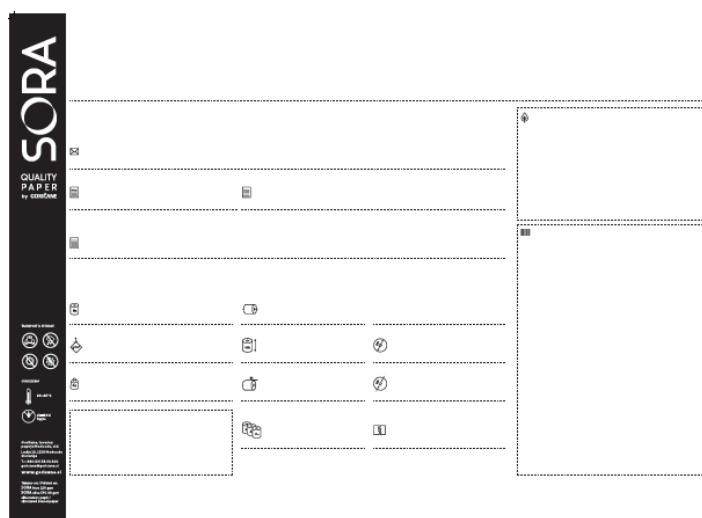

The recommended relative humidity of the location where the wrapping gets removed from the unit ranges between 40 % and 50 % and the recommended temperature is between 20°C and 26°C.

In case of noncompliance with the recommended conditions, paper characteristics can change due to incorrect relative humidity. Under such circumstances we cannot accept complaint which has been made on the basis of unconditioned paper or paper usage outside of the recommended values of relative humidity and temperature of the location where the paper has been used. For more information please contact the customer technical support and we will be happy to assist you.

Customer technical support